




TYPICAL FOUNDATION CROSS SECTION

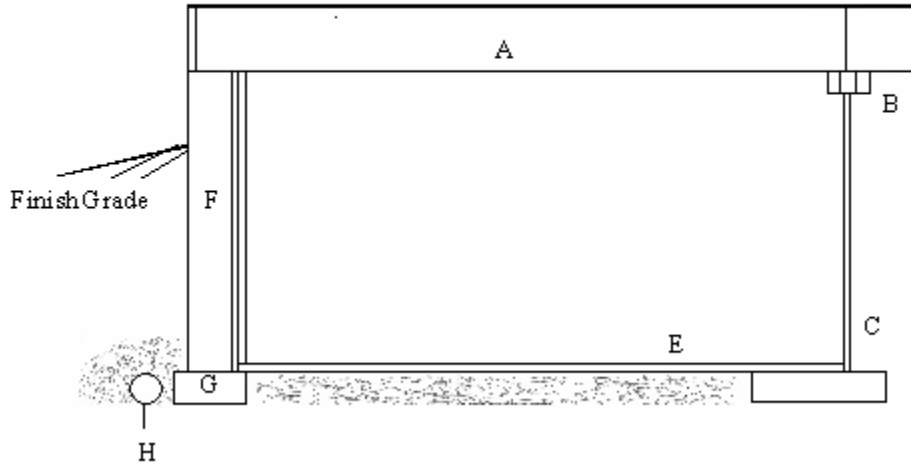

A. FLOOR

Subfloor _____
 Joists _____ X _____ - _____ o.c. D.F. _____ Spruce _____ Other _____

B. BEAM

Size _____ Ply _____ X _____ D.F. _____ Spruce _____ Other _____
 Spacing between supports _____

C. COLUMNS

Telepost _____ 6" X 6" Wood _____ Other _____

D. CONCRETE PAD FOOTINGS

Size _____ X _____ X _____ Reinforced: Yes No

E. CONCRETE FLOOR SLAB

Slab thickness _____ Gravel thickness _____ c/w 6 mil poly _____

F. FOUNDATION WALL

Exterior Dampproofing, _____ concrete wall
 Interior Dampproofing, Min R-8 Insulation, 2' below grade, and 6 mil poly vapour barrier.

Note: Preserved Wood Foundations require engineered stamped plans.

G. CONCRETE STRIP FOOTINGS

Thickness _____ Width _____

H. DRAINAGE (WEEPING) TILE

Min. 4" weeping tile covered with at least 6" of crushed stone.